



EVO LUX®
LUXURY EVOLVING

Apres



Apres

The Apres Series embodies the cozy charm of wooden aesthetics, reminiscent of a relaxing mountain hideaway, ideal for creating a warm and inviting atmosphere.

Apres Mocha 9"x60"

SPC Rigid Core Click Floating - 20mil - Wood Embossed





9"x60"
 23x152 cm
20 mil - EIR (Embossed in Registered)
Bevel: Painted Micro-Bevel



Apres Galao 9"x60"



Panna



9"x60"
 EVAPRES004



Galao



9"x60"
 EVAPRES006




Latte




9"x60"
 EVAPRES002

***Coordinating Trims Available**
 T-mold, reducer, stairnosing.

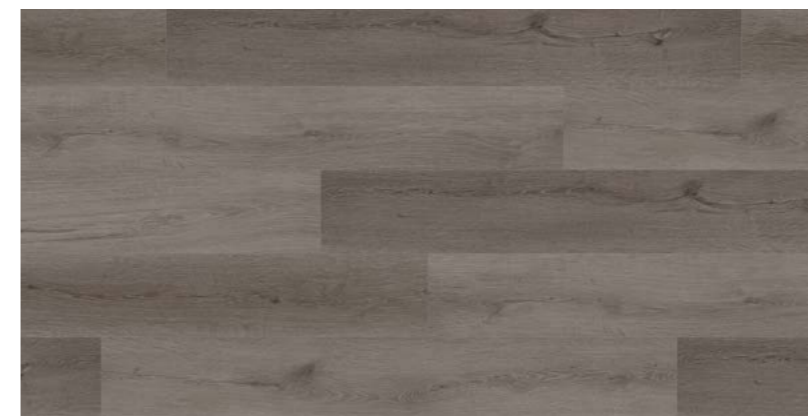

Espresso



9"x60"
 EVAPRES007

5.5 mm


Finish

- Diamond Guard
- Health Guard
- Unilin
- IXPE Pad Attached

9"x60"
23x152 cm

20 mil - EIR (Embossed in Registered)
Bevel: Painted Micro-Bevel

TriCore™ Premium Construction

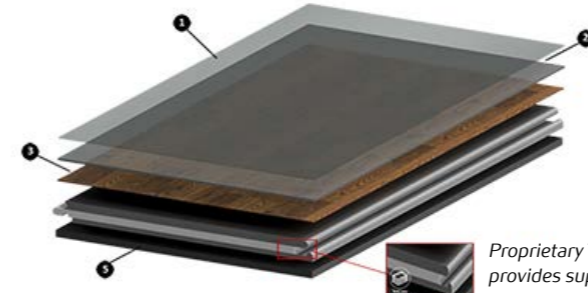

1. Diamond Guard™
2. PVC Wear Layer
3. Printed Film
4. Water proof Tri-Core™
5. QuietStep Cushion™



Macchiato



9"x60"
EVAPRES003



Caramel



9"x60"
EVAPRE5005



Mocha



9"x60"
EVAPRELO05

***Coordinating Trims Available**
T-mold, reducer, stairnosing.



Irish



9"x60"
EVAPRES008

Technical Specifications

	Standard	Result
Thickness		5.5mm
Size		9"x60"
Material		SPC Tricore
Wear Layer		20 mil
Surface Treatment		Diamond Guard / Health Guard
Surface Texture		EIR Registered Embossed
Padding		1mm IXPE
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		Painted Micro-bevel
Smoke Density	ASTM E662-19	Pass
Static Coefficient of Friction	ASTM C1028-07e1	Pass
Chemical Resistance	ASTM F925	Pass
Resistance to light	ASTM F1514	Pass
Abrasion resistance	ASTM D4060-14	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 68 dB 6" concrete slab drop ceiling
Static load	ASTM F970	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes
Phthalate free		Yes



Packaging Information

Size	SF per carton	PC per carton	BX per pallet
7"x48"	30.18	8	44